

Processing High-Level Radioactive Waste in the U.S. – A Mathematical Model

Victoria Czempinski¹, vc@wip.tu-berlin.de
Sebastian Wegel¹, sw@wip.tu-berlin.de
Christian von Hirschhausen^{1,2}, cvh@wip.tu-berlin.de
Ben Wealer^{1,2}, bw@wip.tu-berlin.de

¹ TU Berlin, Workgroup for Economic and Infrastructure Policy (WIP); ² DIW Berlin, Energy, Transport, and Environment

Overview

The greatest problem the U.S. are facing regarding the storage of radioactive waste is the missing of a geological disposal for high-level radioactive waste (HLW). The only existing permanent storage facility is the Waste Isolation Pilot Plant (WIPP) in New Mexico. However, this repository only allows for low- and medium-level waste to be stored. Along the change of current federal law including the WIPP Land Withdrawal Act would include WIPP in the short list of possible storage facilities. A real option for a repository is Yucca Mountain in Nevada as the necessary research has already been conducted and the geological repository is completed, being able to store up to 70,000 metric tons of waste.

This paper models the processing of HLW in the U.S., as they have more nuclear plants than any other country in the world. Since the mid-1980s plans to move all the high-level radioactive waste to Yucca Mountain exist. Since handling radioactive material poses extreme risks, the costs associated with these tasks are enormous. Here, a model is introduced that evaluates the economic challenges for processing, transporting and storing HLW from all nuclear reactors in the U.S. to the final repository in Yucca Mountain at the least possible costs.

Methods

The model is one of transportation which includes a network consisting of all reactors in the U.S. as well as potential final repositories and potential locations for intermediate storages. It allows the building of a total of nine intermediate repositories strategically located around the whole country, so that not all of the HLW has to be transported directly to the destination at once. Furthermore, the goal is to achieve an economically optimal, achievable, and sustainable plan of transportation and storage for HLW produced in all nuclear plants in the U.S.

The mathematical model is a mixed-integer problem consisting of linear constraints for balance and capacity limitations and the binary decision of building intermediate storages. The objective is the minimization of the overall cost consisting of storage costs, transportation costs, construction costs for building new storage facilities and processing costs. A total of five scenarios are implemented and discussed. Some consider solely the opening of Yucca Mountain as a final repository, whereas others also consider the extension of WIPP as a repository for HLW as well as evaluate reprocessing as an option to reduce the overall waste. The transportation follows the routes approved by the NRC and includes transport by train as well as by truck. The time frame of the model is the next 40 years but can be extended for a longer-term perspective. In addition, processing costs caused by the decay of transportation and storage casks for HLW are taken into account. The model differentiates between different types of waste: the main type is Spent Nuclear Fuel (SNF), here the amount produced until today as well as future production of SNF are considered. Furthermore, waste from decommissioning reactors and waste that has been reprocessed and vitrified are included in the model.

Results

The overall costs for scenario 1 – only Yucca Mountain – estimated by the model amount up to about \$ 3.154 billion. This is a relatively small sum compared to the costs occurring inside the reactors and the construction costs for a geological disposal facility. This leads to the conclusion that the costs of transportation of HLW are not the most decisive ones. Transportation costs seem to be less influential than storage and technology costs (Figure 1). The

interim storage capital costs make up almost half of the overall costs. The overall costs per year have a slight peak at the opening date of a final repository but are much lower afterwards (Figure 2).

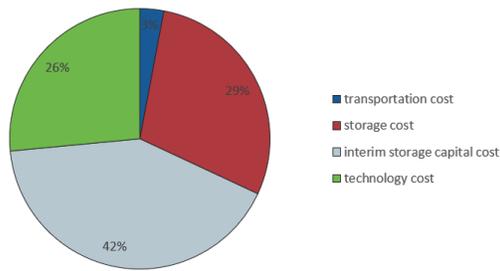


Figure 1: Overall cost composition



Figure 2: Cost over time

Concerning the intermediate storage, it seems that the construction of three intermediate storage facilities would be necessary to provide storage capacity and reduce storage costs until the opening of final repositories. Locations should be strategically chosen either close to the reactors or close to a final repository under construction. In order to be cost efficient, a larger capacity in intermediate storage (at least 40,000 MTU) than the one the Department of Energy has planned to provide by 2025 would be needed.

Conclusion

When comparing the results of the scenarios, the cost difference shows that any tardiness in finding and operating a final repository increases the overall waste disposal costs by at least 15-25% for any ten years of delay. The construction of intermediate repositories will reduce the costs and improve the disposal process. Furthermore, reprocessing is not cost efficient and, additionally, not possible due to proliferation reasons. Finally, it can be said that the capacity of Yucca Mountain alone is not sufficient for all of the HLW and another option, like a second repository, will be needed.

Due to the lack of public information it is very hard to give accurate numbers on the real costs of the disposal process. Many assumptions had to be made to develop this model. This is considered one of the major issues regarding the quality of the results. Especially since most of the costs are estimated and their impact is critical for the outcome.

References

Eureka County Yucca Mountain Information Office. 2018. "Home Page." Accessed via the Internet on 28.01.2018 at <http://www.yuccamountain.org/index.htm>.

Lovins, A. B., Lovins, L. H., and Ross, L. 1980. "Nuclear Power and Nuclear Bombs." *Foreign Affairs* 58 (5): 1137–1177.

North, D. W. 2013. "Can Sisyphus Succeed? Getting U.S. High-Level Nuclear Waste into a Geological Repository." *Risk Analysis* 33 (1): 2–14.

Nuclear Regulatory Commission. 2018. "Home Page." Accessed via the Internet on 28.01.2018 at <https://www.nrc.gov>.

Scherwath, T. 2016. *The Decommissioning of Germany's Nuclear Power Plants*. Bachelor Thesis, Technische Universität Berlin.

Wealer, B., Czempinski, V., Hirschhausen, C. von, and Wegel, S. 2017. "Nuclear Energy Policy in the United States: Between Rocks and Hard Places." *Energy Forum Second Quarter 2017*.

World Nuclear Association. 2017. "Radioactive Waste Management." Accessed via the Internet on 29.01.2018 at <http://www.world-nuclear.org/information-library/nuclear-fuel-cycle/nuclear-wastes/radioactive-waste-management.aspx>.